

Pioneer Series, 60 Cell Modules

Electrical Data¹

All data refers to STC (AM 1.5, 1000 W/m², 25°C)

Parameter	250	260	265	270
Peak Power P _{max} (Wp)	250	260	265	270
Maximum Voltage V _{mpp} (V)	30.8	30.9	31.0	31.1
Maximum Current I _{mpp} (A)	8.14	8.42	8.56	8.69
Open Circuit Voltage V _{oc} (V)	37.5	37.7	37.8	37.9
Short Circuit Current I _{sc} (A)	8.62	8.89	9.02	9.15
Module Efficiency (%)	15.4	16.01	16.32	16.62

1) STC: 1000 W/m² irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3. Average relative efficiency reduction of 5% at 200 W/m² according to EN 60904-1.

Electrical Parameters at NOCT²

Parameter	183	190	196	200
Power (W)	183	190	196	200
V@P _{max} (V)	27.72	27.81	27.9	28.01
I@P _{max} (A)	6.60	6.82	7.01	7.12
V _{oc} (V)	34.87	35.06	35.15	35.24
I _{sc} (A)	6.98	7.21	7.31	7.42

2) NOCT irradiance 800 W/m², ambient temperature 20°C, wind speed 1 m/sec

Temperature Coefficients (Tc) permissible operating conditions

Tc of Open Circuit Voltage (β)	-0.31%/C
Tc of Short Circuit Current (α)	0.0402%/C
Tc of Power (γ)	-0.426%/C
Maximum System Voltage	1000V
NOCT	45C ± 2C
Temperature Range	-40C TO +85C

Mechanical Data

Length × Width × Height	1645 X 987 X 40mm
Weight	22Kgs
Junction Box	1P67, 3 By Pass Diodes
Cable & Connectors	1000mm Length Mc4 Connectors
Application Class	Class A [Safety Class II]
Superstrate	3.2mm High Transmission Low Iron Tempered Glass, AR Coated
Cells	60 Cells, 4BB/5BB Cells, Poly Mono
Cell Encapsulant	EVA
Back Sheet	PET
Frame	Anodized Al Alloy Type 6063
Mechanical Load Test	5400 PA

Warranty and Certifications


Product Warranty**	10 years
Performance Warranty**	Linear power warranty for 25 years with 2.5% for 1st year degradation and 0.67% from year 2 to year 25
Approvals and Certificates	IEC 61215, IEC 61730 Part 1 & 2 IEC 61701

** Refer to IB Solar Warranty Document For Terms & Conditions


CAUTION: READ SAFETY AND INSTALLATION MANUAL BEFORE USING THE PRODUCT.

Specifications included in this datasheet are subject to change without notice. Electrical data without guarantee. Please confirm your exact requirement with the company representative while placing your order.


Dimensions in mm

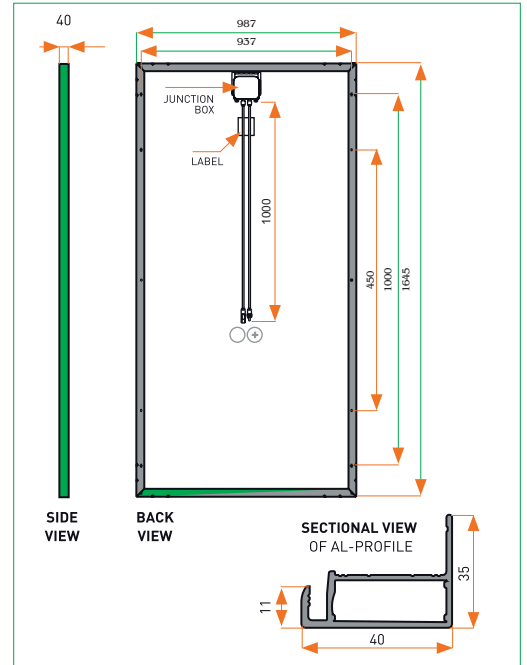

Typical I-V Curves

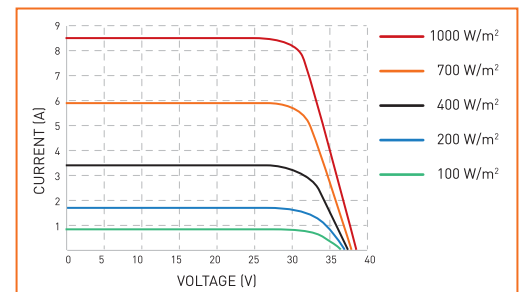

Performance Warranty

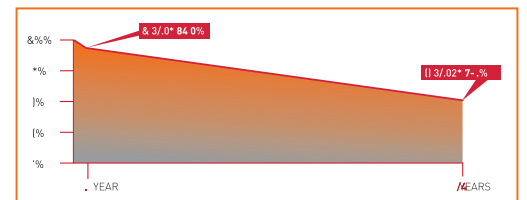

Packaging Information

Container	20'GP	40'GP	40'HC
Pallets/Container	10	28	28
Pieces/Container	250	700	700

A Product Of:

Integrated Batteries India Pvt Ltd

D-127, Sector-63 Noida (U.P.)

www.ibsolar.co.in